



AP-1000

AP Series Features

High Output 3 Stage Pump

Heavy Duty Air Motor

Powerful 4HP industrial air motor runs on 50cfm/90PSI

Quadra-Torc Function (Optional)

Available in single and multi-port designs for running multiple tools simultaneously

Disconnect Removable Pressure Gauge

Precise PSI/BAR 4" gauge allows for safe storage

Quick Connect Couplers

Each pump and hose is fitted with a quick connect, no-drip, threadless safety couplers, with 2:1 safety ratio

Supplied with dual non-conductive

high pressure 15' hose with couplers and 12' remote pendant control

Standard Carrying Handle Provided

optional roll cage available to protect motor

Sevlicable Motor Vanes & Springs

reduce operation costs

For Use In Harsh Environments

Quiet Operation

Approx. 80dB @ 10,000PSI

Rugged Remote

Pendant to control motor and valve


Auto Dump

Relieves all pressure from hoses


Filter-Lubricator

Supplied with high flow F/R/L for long trouble free operation

1.5 Gallon Reservoir

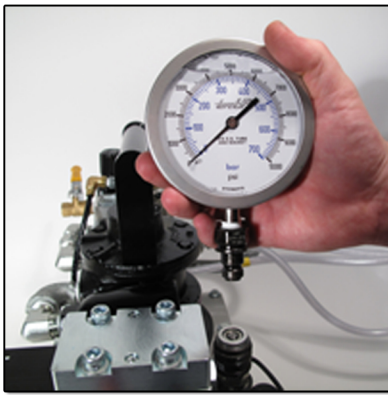

Removable Pressure Gauge

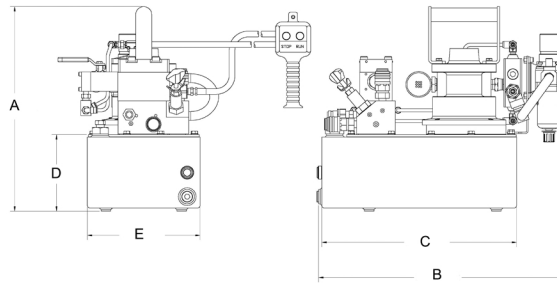

Usable Reservoir Capacity		A		B		C		D		E	
(Gal.)	(litre)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)
1.5	5,7	15.13	384,3	19.09	484.88	15.89	406.48	5.94	150.88	8.75	222.25

Weight is without oil.

Model Number	Reservoir		Valve			Pendant	Motor Specification	Flow Rate	Weight	
	Gal.	Litre	Model	Style	Function				lbs.	Kg
AP1000	1.5	5,7	Torque	Auto Retract	Advance/Retract	Motor/Solenoid Control	4 HP @ 90 psi/ 50cfm	700 cu. in./min. @ 0 psi 575 cu.in./min. @ 1,100 psi 55 cu.in./min.@10,000 psi	63.75	28,92

Torcup Inc.

1025 Conroy Place Easton, PA 18040 www.torcup.com sales@torcup.com

Toll Free: 1-888-Torcup-1 Phone: 610-250-5800