

Hyspan

RT Remote Hydraulic Torque Tool

The Hyspan Remote Hydraulic Torque Tool is particularly suitable for those bolting jobs where remote operation is necessary, including maintenance work above and below ground, offshore, and subsea.

- Repeatability of +/- 4%
- Significantly quicker than conventional ratchet style hydraulic torque wrenches
- Remotely operated – suitable for diver inaccessible applications (e.g. deep water and hazardous)
- Non-impacting operation
- Finished in high visibility, corrosion resistant, marine quality paint
- Compatible with Remote Operated Vehicles (ROVs)
- Supplied with individual calibration certificates

CHRISTIE
TOTAL TORQUE SOLUTIONS



HYSpan REMOTE HYDRAULIC




Hyspan Remote in use on subsea lifting frame for positioning of concrete reinforcement blocks on underwater structure.



**HIRE, SALES
& ADVICE**
01709 550088

See table below for dimensions and detail

Model	Dimensions (mm)			Weight Kg	Speed (rpm)	Torque Range (Nm)		Square Drive
	A	B	C			Min	Max	
HY10RT	72	345	n/a	<22.5	15	190	1,000	¾ / 1"
HY20RT	72	345	n/a	<22.5	8	400	2,000	1"
HY34RT	78	340	n/a	~9.0	5.5	680	3,400	1"
HY34RT-90°	280	78	255	~10.0	5.5	680	3,400	1"
HY70RT	144	395	n/a	~25.0	2.5	1,762	6,000	1½"
HY90RT	184	389	n/a	~30.0	1.8	2,710	9,500	1½"
HY110RT	216	484	n/a	~40.0	1.2	4,400	20,000	2½"

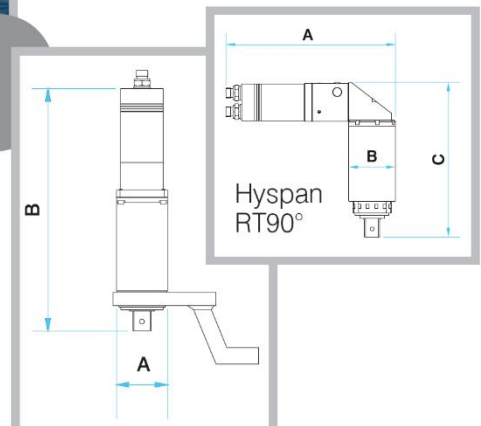

Hyspan RT operates at 7-22 litres per minute flow rate.

Max. operating pressure 2,030 psi.

t:+44 (0)1709 550088 e:info@wchristie.com www.wchristie.com

W. Christie (Ind) Ltd, Christie House,
Meadowbank Road, Rotherham, S61 2NF