


Hyspan

PG Hydraulic Torque Tool



HYSPAN PISTOL GRIP HYDRAULIC

Up to 26 times faster than conventional ratchet style hydraulic torque wrenches.

The Hyspan Pistol Grip Torque Tool is the perfect tool for difficult and critical bolting in a wide range of operating environments, including subsea and offshore applications. This robust tool is versatile and can be used for applications other than bolting, such as the rundown of valves.

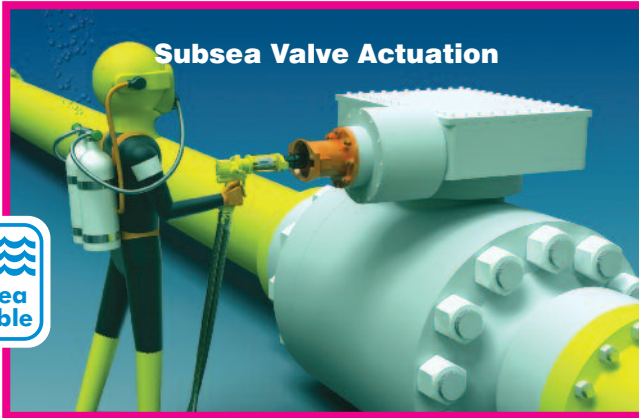

- Repeatability of +/-4%
- Low noise level of 76 decibels
- Non-impacting and low vibration (less than 0.5 m/s²)
- Easy access to forward and reverse switching
- Oversized safety trigger
- Finished in high visibility, corrosion resistant, marine quality paint
- Integral lifting point
- Quick-release couplings
- Supplied with individual calibration certificates

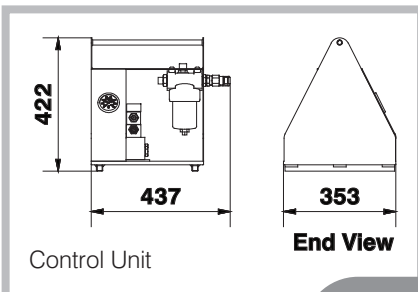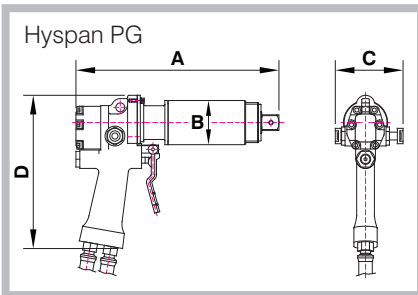

Hyspan PG powered from hydraulics of an excavator.

The flexibility of the Hyspan PG allows the tool to be operated via a power pack or from a hydraulic supply on plant vehicle hydraulics and Remote Operated Vehicles – ROVs.

Storage boxes available on request

Special models available on request

Special reactions can be designed and manufactured quickly to suit your individual applications

See table for dimensions and details

Model	Dimensions (mm)				Weight Kg	Speed (rpm)	Torque Range (-Nm)		Square Drive
	A	B	C	D			Min	Max	
HY10PG	335	72	110	255	7.5	28	110	1,000	¾ / 1"
HY20PG	335	72	110	255	7.5	15	190	2,000	1"
HY34PG	330	78	110	255	8.5	9.5	290	3,400	1"

Hyspan PG operates at 15-45 litres per minute flow rate. Max. operating pressure 1,500 psi.



t: +44(0)1709 550088 f: +44(0)1709 550030 e: info@wchristie.com www.wchristie.com
W. CHRISTIE (INDUSTRIAL) LTD. Christie House, Meadowbank Road, Rotherham, South Yorkshire, S61 2NF UK